


POS.	DESIGNATION	MATERIAL
1	body	A216 Grade WCB
2	seal	Graphite
3	wire net	stainless steel
4	seal	Graphite
5	plug	A193B7
6	bonnet	A216 Grade WCB
7	stud	A193B7
8	nut	A194-2H

DN	PN	L	h	kg
15	40	130	72	3,4
20	40	150	80	3,9
25	40	160	85	4,4
32	40	180	110	8,4
40	40	200	125	20
50	40	230	132	14
65	40	290	160	22
80	16	310	182	29
100	16	350	206	39
125	16	400	223	54
150	16	480	246	71
200	16	600	286	134

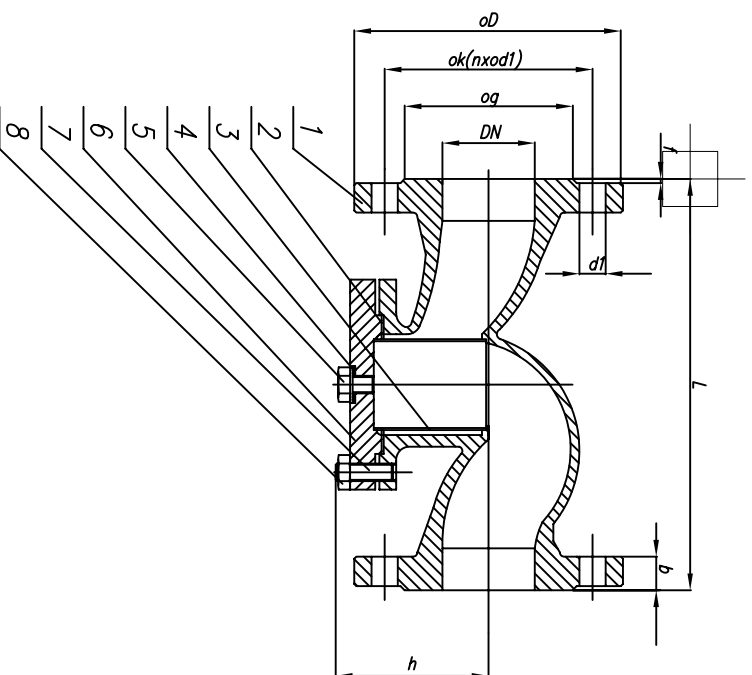

WORKING PRESSURE  $p < 40$  bar  
 WORKING TEMPERATURE max. 450 °C

APPROVED SERVICES: STEAM, NON-CORROSIVE LIQUIDS AND GASES  
 DESIGN AND PERFORMANCE STANDARD: DIN 3840

DIMENSIONS b, aD, DN, od, og AND ok(nxodf) ARE IN ACCORDANCE WITH DIN 2501

SCALE	DESIGNED	CHK'D	APP'D	DATE
	106. 1898	106. 1898	106. 1898	
	108. 1898	108. 1898	108. 1898	
	109. 1898	109. 1898	109. 1898	
	110. 1898	110. 1898	110. 1898	
	111. 1898	111. 1898	111. 1898	
	112. 1898	112. 1898	112. 1898	
	113. 1898	113. 1898	113. 1898	
	114. 1898	114. 1898	114. 1898	
	115. 1898	115. 1898	115. 1898	
	116. 1898	116. 1898	116. 1898	
	117. 1898	117. 1898	117. 1898	
	118. 1898	118. 1898	118. 1898	
	119. 1898	119. 1898	119. 1898	
	120. 1898	120. 1898	120. 1898	

OMV-VENTIL Strainer DN 15-200 PN 16, 40 DWG. 302 - 26